



PLAN VIEW OF RAMP

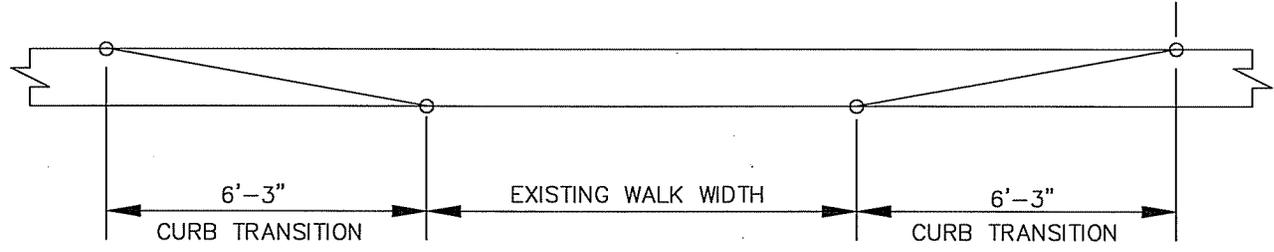

PROFILE OF CURB EXPOSURE

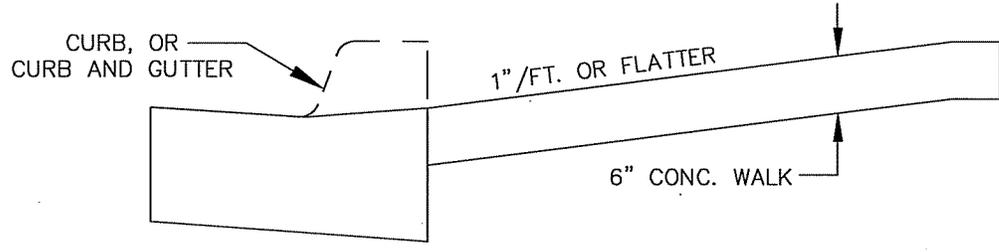

- NOTES: 1. THE CURB AND CURB TRANSITION ON THE RAMP WILL BE PAID FOR AS LINEAR FEET OF CONCRETE CURB OR CONCRETE CURB AND GUTTER. THE RAMP AREA WILL BE PAID FOR AS SQUARE FEET OF CONCRETE WALK. THE TRUNCATED DOME AREA WILL BE PAID FOR AS SQUARE FEET TRUNCATED DOME.
2. TAPER SHALL BE 6'-3" WHEN CONCRETE IS BEHIND THE CURB AND SHALL BE 3' WHEN SOD IS BEHIND THE CURB
3. TRUNCATED DOME TILE INSERTS MUST BE CAST IRON AND SHALL BE PROVIDED BY NEENAH FOUNDRY, EAST JORDAN IRON WORKS, OR APPROVED EQUAL.

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Minnesota

DANIEL A. HAAK
 DANIEL A. HAAK
 Date 3/19/07 Lic. No. 17274

APPROVED 3 20 07
J.P. Mag...
 CITY ENGINEER

CITY OF ST. PAUL
 DEPARTMENT OF PUBLIC WORKS
 PEDESTRIAN CURB RAMP
 FOR THE HANDICAPPED

Date of Revision
 FEB 2007

Standard Plate No.
 3006D