

CITY ENGINEER

CITY OF ST. PAUL
DEPARTMENT OF PUBLIC WORKS
CONCRETE CURB AND GUTTER
DESIGN B

Date of
Revision
JULY
2002

Standard
Plate
No.
3100C

APPROVED


[Signature]

Date *8/30/02* Lc. No. *17274*

DANIEL A. HAAK

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Minnesota

[Signature]

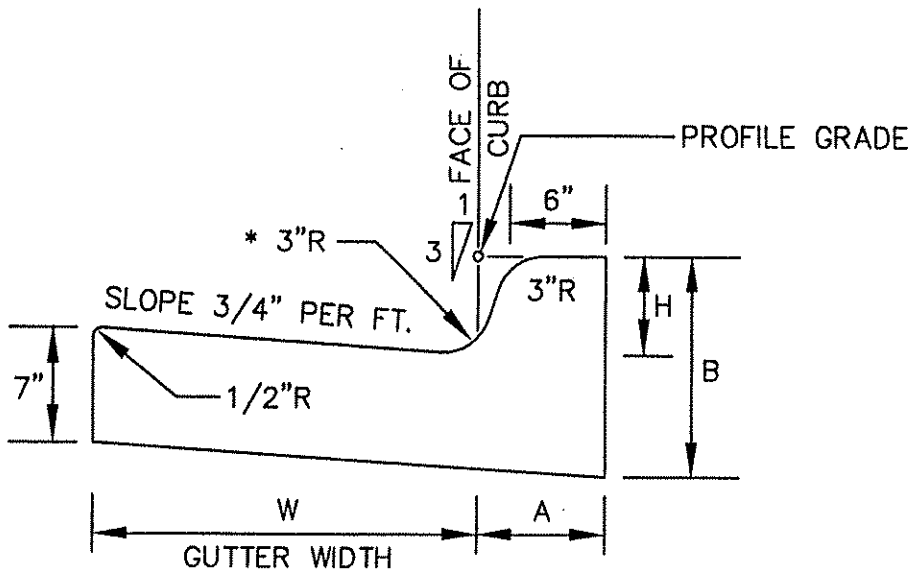

* USE 2-5/8" RADIUS FOR CURB HEIGHT OF 4"

DIMENSIONS			W = 12"			W = 18"			W = 24"			W = 30"		
			DESIGN NO.	CONCRETE		DESIGN NO.	CONCRETE		DESIGN NO.	CONCRETE		DESIGN NO.	CONCRETE	
				CU. YDS. PER LIN. FT.	LIN. FT. PER CU. YD.		CU. YDS. PER LIN. FT.	LIN. FT. PER CU. YD.		CU. YDS. PER LIN. FT.	LIN. FT. PER CU. YD.		CU. YDS. PER LIN. FT.	LIN. FT. PER CU. YD.
H	A	B												
4	7-3/8"	11-1/2"	B412	0.0421	23.8	B418	0.0529	18.9	B424	0.0637	15.7	B430	0.0745	13.4
6	8"	13-1/2"	B612	0.0474	21.1	B618	0.0582	17.2	B624	0.0690	14.5	B630	0.0798	12.5
8	8-5/8"	15-1/2"	B812	0.0529	18.9	B818	0.0637	15.7	B824	0.0745	13.4	B830	0.0853	11.7
9	9"	16-3/8"	B912	0.0559	17.9	B918	0.0667	15.0	B924	0.0775	12.9	B930	0.0883	11.3
10	9-3/8"	17-5/8"	B1012	0.0589	17.0	B1018	0.0697	14.4	B1024	0.0805	12.4	B1030	0.0913	11.0