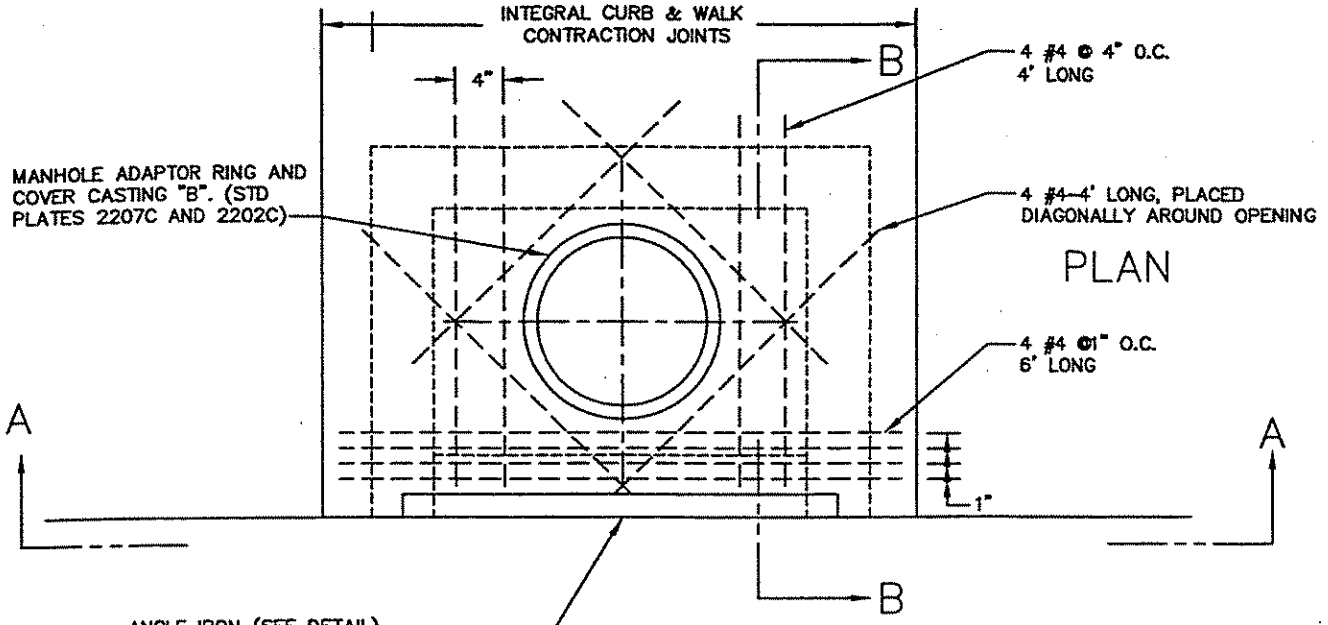

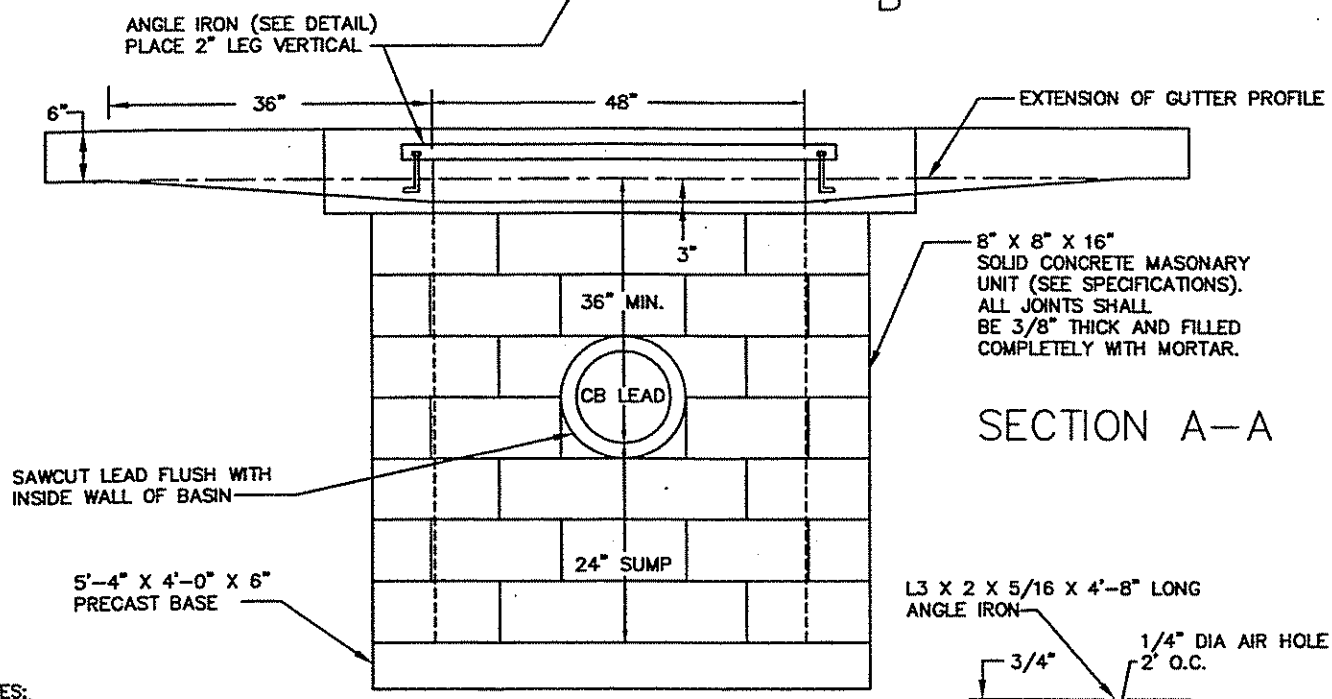

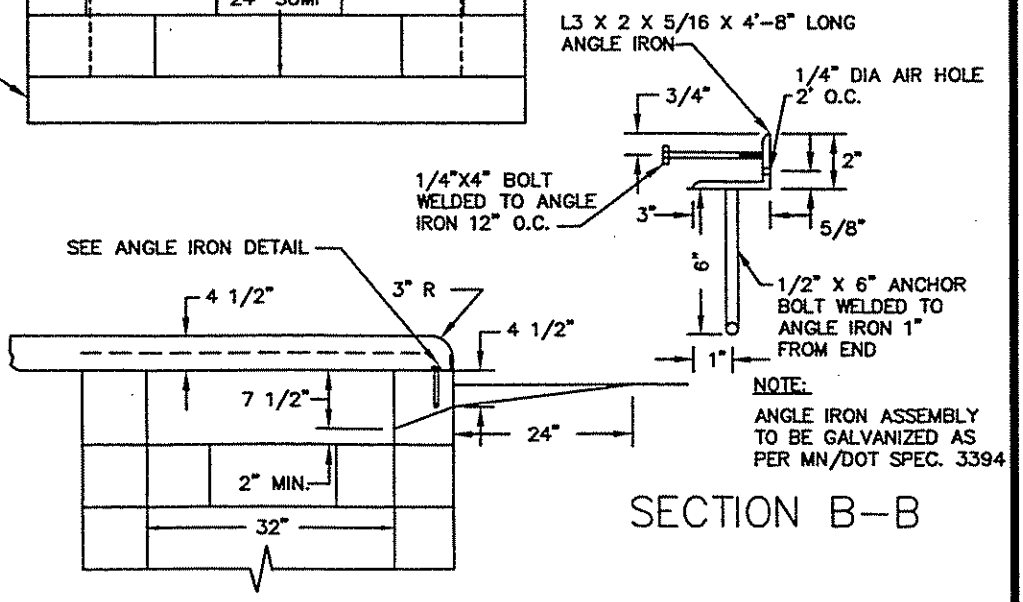

NOTES:

1. REINFORCING STEEL TO BE GRADE 60 FUSION BONDED EPOXY COATED PER ASTM A775
2. MINIMUM CLEAR DISTANCE TO REBAR=1"
3. REMOVE ALL FORMWORK FROM INTERIOR OF CATCHBASIN
4. FOR USE WITH INTEGRAL CURB & WALK
5. TO BE USED ONLY WHERE MAJOR UTILITY CONFLICT PROHIBITS USE OF TYPE 7A CATCH BASIN

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Minnesota.

JOSEPH J MUELLER

Date 9-2-02 Lic. No. 13942

APPROVED CITY ENGINEER	CITY OF ST. PAUL DEPARTMENT OF PUBLIC WORKS CATCH BASIN, TYPE 2B	Date of Revision JULY 2002	Standard Plate No. 2004D